

KODI

PERSHKRIMI

LISTINO

1 + 200

3.027832

**INOX SOL 200 V2**

€ 3.018,00

SISTEM diellor i kompletuar, i perbere nga:

A. **Bolitor INOXSTOR 200 lt** prej çeliku inoxi, per uje sanitar

\* GRUP qarkullimi, ne Kthim, 1-6 lt/min, me kit lidhje

\* ÇENTRALINE diellore

B. **Nr. 1 PANEL Diellor i sheshet CP4 XL** me nr. 1 Kit

Telajo alumini dhe aksesore, instalim ne Vertikal

C. **VAZO ekspansioni** 18 litra me aksesore

D. **RAKORDERI hidraulike** e plote per montimin e Panelit

E. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"

F. **Kove GLIKOLI**, i paramishelluar prej 20 kg.

G. **Nr. 4 Stafa per Tjegulla**, me aksesore te ndryshem fiksimi

**SHENIM:** instalimi i ketij Bolitori kerkon instalimin e nje Vazo ekspansioni sanitar dhe nje valvule sigurie te pershtatshme. Keta artikuj nuk perfshihen ne artikujt te pershkruar.




3.020861

**artikuj shtese, me KERKESE, IMMERGAS**

**KIT Rezistence elektrike, 2 kW per Bolitor**

çmim njesi

€ 230,50



3.022674

**KITe per instalim Vertikal - TARRASE - me kend 45°**

nr. 01 Kit per nr. 1 Panel CP4 XL / M

€ 123,50

nr. 1 me nr 4 profile + aksesore



3.019105

Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M

€ 61,00

nr. 1 Per çati me tjegulla per t'u bere **BIRA**

pa foto

3.022776

Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M

€ 68,00

nr. 1 per nr. 1 panel mbi çati lisho



3.022922

KIT elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor  
 Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen  
 sebashku me kitet fiksimi 3.022922

€ 34,00

2 + 300

3.027834

**INOX SOL 300 V2**

€ 3.811,00

SISTEM diellor i kompletuar, i perbere nga:

A. **Bolitor INOXSTOR 300** lt prej çeliku inoxi, per uje sanitar

\* GRUP qarkullimi, ne Kthim, 1-6 lt/min, me kit lidhje

\* ÇENTRALINE diellore

B. **Nr. 2 PANELE Diellore te sheshte CP4 XL** me nr. 1 Kit

Telajo alumini dhe aksesore, installim ne Vertikal

C. **VAZO ekspansioni** 18 litra me aksesore


D. **RAKORDERI hidraulike** e plote per montimin e Panelit

E. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"

F. **Kove GLIKOLI** i paramishelluar prej 20 kg.

G. **Nr. 6 Stafa per Tjegulla** per installimin mbi çati te pjerreta, me aksesore te ndryshem fiksimi.

**SHENIM:** instalimi i ketij Bolitori kerkon instalimin e nje Vazo ekspansioni sanitar dhe nje valvule sigurie te pershtatshme. Keta artikuj nuk perfshihen ne artikujt te pershkruar.

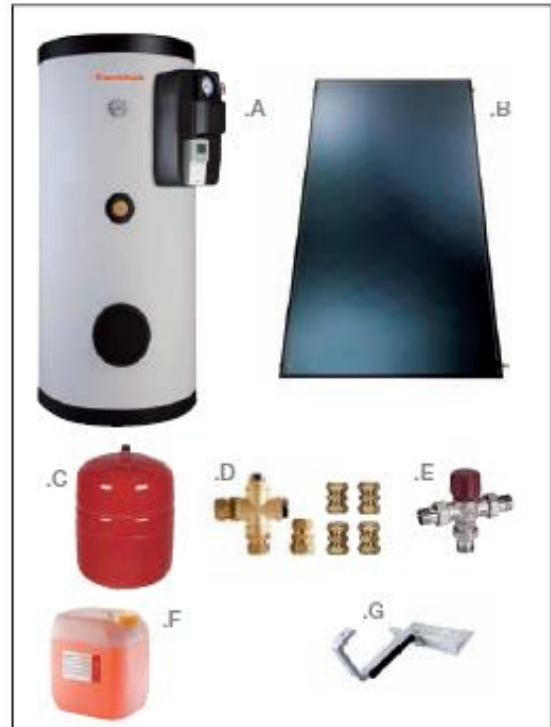

**artikuj shtese, me KERKESE, IMMERGAS**

çmim njesi




3.020861

**KIT Rezistence elektrike, 2 kW** per Bolitor

€ 230,50

**KITE per instalim Vertikal - TARRASE - me kend 45°**



3.022674

nr. 01 Kit per nr. 1 Panel CP4 XL / M

€ 123,50

**nr. 1** me nr 4 profile + Aksesore

3.022677

nr. 01 Kit zgjerimi per 1 Panel CP4 XL / M

€ 103,00

**nr. 1** me nr. 2 profile + Aksesore



3.019105

Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M

€ 61,00

**nr. 2** Per çati me tjegulla per t'u bere **BIRA**

pa foto

3.022776

Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M

€ 68,00

**nr. 2** per nr. 1 panel mbi çati lisho



3.022922

KIT elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor

Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen

sebashku me kitet fiksimi 3.022922

€ 34,00

4 + 500

3.027836

**INOX SOL 500 V2**

€ 5.871,00

SISTEM diellor i kompletuar, i perbere nga:

A. **Bolitor INOXSTOR 500 lt** prej çeliku inoxi, per uje sanitar

\* GRUP qarkullimi, ne Kthim, 1-6 lt/min, me kit lidhje

\* CENTRALINE djellore rregullimi, me sonde temperature

B. **Nr. 4 PANELE Djellore te sheshte CP4 XL** me nr. 2 Kite

Telajo alumini dhe aksesore, installim ne Vertikal

C. **VAZO ekspansioni 35 litra** me aksesore


D. **RAKORDERI hidraulike** e plote per montimin e Paneleve diellore

E. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"

F. nr. 2 **Kova GLIKOLI** i paramishelluar prej 20 kg. ( 40 kg)

G. **Nr. 10 Stafa per Tjegulla** per installimin mbi çati te pjerrreta, me aksesore te ndryshem fiksimi.

**SHENIM:** instalimi i ketij Bolitori kerkon instalimin e nje Vazo ekspansioni sanitar dhe nje valvule sigurie te pershtatshme. Keta artikuj nuk perfshihen ne artikujt te pershkruar.

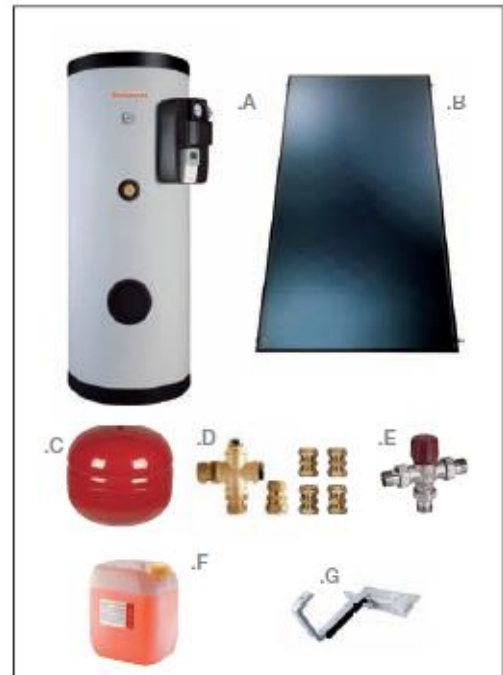


artikuj shtese, IMMERGAS

çmim njesi

3.020861 **KIT Rezistence elektrike, 2 kW** per Bolitor

€ 230,50



**KITE per instalim Vertikal - TARRASE - me kend 45°**

3.022674 nr. 01 Kit per nr. 1 Panel CP4 XL / M

€ 123,50

**nr. 1** me nr 4 profile + Aksesore

3.022677 nr. 1 Kit zgjerimi per 1 Panel CP4 XL / M

€ 103,00

**nr. 3** me nr. 2 profile + Aksesore



3.019105 Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M

€ 61,00

**nr. 3** Per çati me tjegulla per t'u bere **BIRA**

pa foto

3.022776 Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M

€ 68,00

**nr. 3** per nr. 1 panel mbi çati lisho



3.022922 **KIT** elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor  
Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen  
sebashku me kitet fiksimi 3.022922

€ 34,00

3.025641

**BASIC SOL V2**

€ 1.957,00

SISTEM diellor i perbere nga:

- A. **Nr. 1 PANEL Diellor i sheshet CP4 XL** me nr. 1 Kit  
Telajo alumini dhe aksesore per installimin ne Vertikal
- B. GRUP qarkullimi, ne Kthim, 1-6 lt/min, me kit lidhje
- C. ÇENTRALINE diellore
- D. **VAZO ekspansioni** 18 litra me aksesore
- E. **RAKORDERI hidraulike** e plote per montimin e Panelit
- F. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"
- G. **Kove GLIKOLI**, i paramishelluar prej 20 kg.
- H. **Nr. 4 Stafa per Tjegulla**, me aksesore te ndryshem fiksimi per instalim mbi çati



3.019998



**BASIC SOL ErP PLUS HERCULES CONDENSING ErP çmim njesi**

3.025641

**BASIC SOL ErP**

€ 1.957,00

3.025492

**HERCULES CONDENSING 26 3 ErP**

€ 4.218,00


Nevojitet edhe Kiti vijues per te bere lidhjen me Hercules Condensing dhe panelet Diellore.

3.019998

KIT per Panele Diellore, per Hercules

€ 85,00

artikuj shtese, IMMERGAS

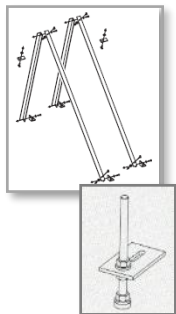

**KITe per installim Vertikal - TARRASE - me kend 45°**

3.022674

nr. 01 Kit per nr. 1 Panel CP4 XL / M  
nr. 1 me nr 4 profile + aksesore

€ 123,50

3.019105

Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M  
nr. 1 Per çati me tjegulla per t'u bere BIRA

€ 61,00

pa foto

3.022776

Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M  
nr. 1 per nr. 1 panel mbi çati lisho

€ 68,00

3.022922

KIT elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor  
Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen  
sebashku me kitet fiksimi 3.022922

€ 34,00



4 + 550

3.027838

**DOMESTIC SOL 550 V2**

€ 7.210,00

SISTEM diellor i kompletuar, i perbere nga:

- A. **Bolitor prej 550 lt** prej çeliku, per uje sanitar, me
- \* Shkembyes çeliku inoxi, prej 28,5 lt, per ujin sanitar
  - \* Shkembyes per integrimin diellor
  - \* rakorde per kaldaje dhe **POMPA di CALORE**
  - \* GRUP qarkullimi Dopjo, 2-12 lt/min, me kit lidhje
  - \* CENTRALINE diellore tip PRO, me 4 sonda temperature
  - \* SONDE NTC per lidhje me Kaldaja nen 35 kW

**SHENIM:** instalimi i ketij Bolitori kerkon instalimin e nje Vazo ekspansioni sanitar dhe nje valvule sigurie te pershtatshme. Keta artikuj nuk perfshihen ne artikujt te pershkruar.

B. **Nr. 4 PANELE Diellore te sheshte CP4 XL** me nr. 2 Kite

Telajo alumini dhe aksesore per installimin ne Vertikal


C. **VAZO ekspansioni 80 litra** me aksesore

D. **RAKORDERI hidraulike** e plote per montimin e Paneleve diellore

E. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"

F. nr. 2 **Kova GLIKOLI** i paramishelluar prej 20 kg. ( 40 kg)

G. **Nr. 10 Stafa per Tjegulla** per installimin mbi çati te pjerrreta, me aksesore te ndryshem fiksimi.

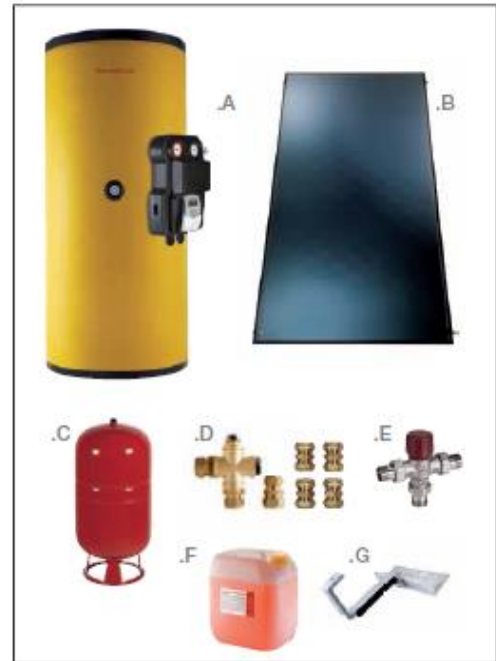


artikuj shtese, IMMERGAS

çmim njesi

3.020861 **KIT Rezistence elektrike, 2 kW** per Bolitor

€ 230,50



**KITE per instalim Vertikal - TARRASE - me kend 45°**

3.022674 nr. 01 Kit per nr. 1 Panel CP4 XL / M

€ 123,50

nr. 1 me nr 4 profile + Aksesore

3.022677 nr. 1 Kit zgjerimi per 1 Panel CP4 XL / M

€ 103,00

nr. 3 me nr. 2 profile + Aksesore



3.019105 Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M

€ 61,00

nr. 3 Per çati me tjegulla per t'u bere **BIRA**

pa foto

3.022776 Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M

€ 68,00

nr. 3 per nr. 1 panel mbi çati lisho



3.022922 KIT elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen sebashku me kitet fiksimi 3.022922

€ 34,00

5 + 750

3.027840

**DOMESTIC SOL 750 V2**

€ 9.579,00

SISTEM diellor i kompletuar, i perbere nga:

- A. **Bolitor prej 750 lt** prej çeliku, per uje sanitar, me
- \* Shkembyes çeliku inoxi, prej 28,5 lt, per ujin sanitar
  - \* Shkembyes per integrimin diellor
  - \* rakorde per kaldaje dhe **POMPA di CALORE**
  - \* GRUP qarkullimi Dopjo, 2-12 lt/min, me kit lidhje
  - \* CENTRALINE diellore tip PRO, me 4 sonda temperature
  - \* SONDE NTC per lidhje me Kaldaja nen 35 kW

**SHENIM:** instalimi i ketij Bolitori kerkon instalimin e nje Vazo ekspansioni sanitar dhe nje valvule sigurie te pershtatshme. Keta artikuj nuk perfshihen ne artikujt te pershkruar.


- B. **Nr. 5 PANELE Diellore te sheshet CP4 XL** me nr. 3 Kite  
Telajo alumini dhe aksesore per instalimin ne Vertikal
- C. **VAZO ekspansioni 80 litra** me aksesore
- D. **RAKORDERI hidraulike** e plote per montimin e Paneleve diellore
- E. **VALVULE mishelatriçe termostatike**, e rregullueshme, 3/4"
- F. nr. **2 Kova GLIKOLI** i paramishelluar prej 20 kg. ( 40 kg)
- G. **Nr. 12 Stafa per Tjegulla** per instalimin mbi çati te pjerreta, me aksesore te ndryshem fiksimi.



artikuj shtese, IMMERGAS

çmim njesi

3.020861 **KIT Rezistence elektrike, 2 kW** per Bolitor € 230,50



**KITE per instalim Vertikal - TARRASE - me kend 45°**

3.022674 nr. 01 Kit per nr. 1 Panel CP4 XL / M € 123,50

nr. 1 me nr 4 profile + Aksesore

3.022677 nr. 1 Kit zgjerimi per 1 Panel CP4 XL / M € 103,00

nr. 3 me nr. 2 profile + Aksesore



3.019105 Kit 4 stafa per Tjegulla, x nr. 1 panel CP4 XL / M € 61,00

nr. 3 Per çati me tjegulla per t'u bere **BIRA**

pa foto

3.022776 Kit 4 stafa, forme "L", per Tjegulla , CP4 XL/M € 68,00


nr. 3 per nr. 1 panel mbi çati lisho




3.022922 KIT elemente fiksimi per 1 panel CP4 XL / M, jane brenda kitit diellor  
Kitet me 4 stafa 3.019105 dhe 3.022776 duhet te vendosen  
sebashku me kitet fiksimi 3.022922 € 34,00



**SKEME INSTALIMI**  
**KIT DIELLOR INOX SOL 200 V2**

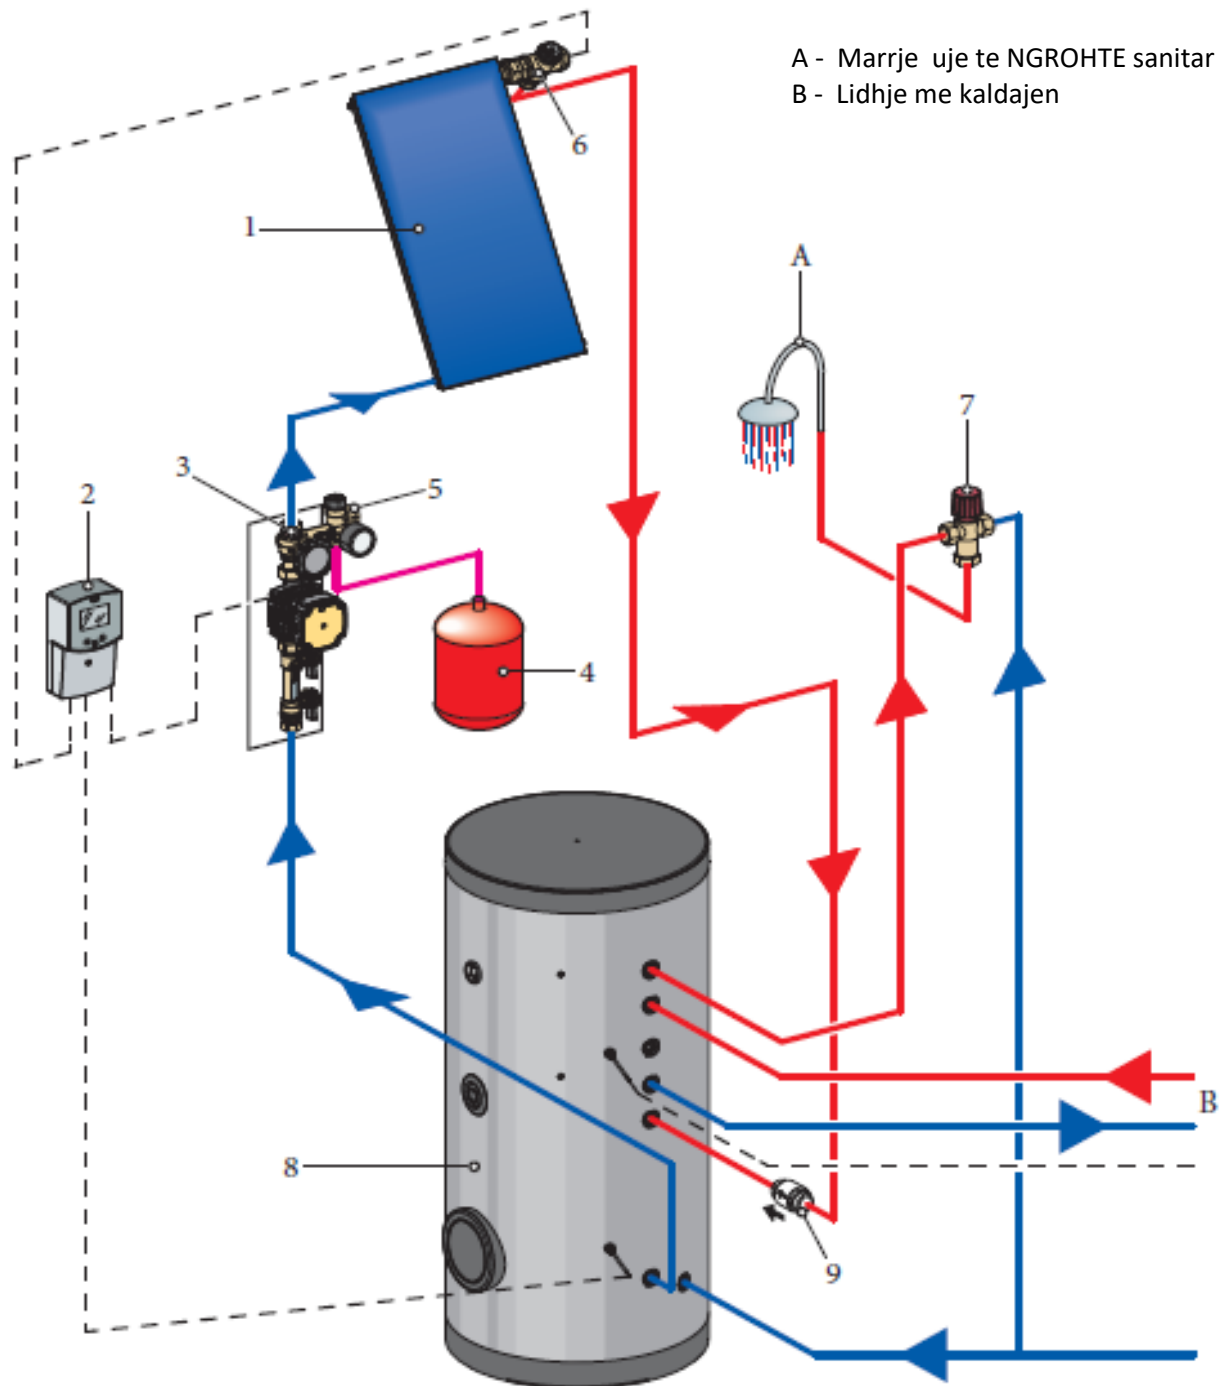


**SKEME INSTALIMI**  
**KIT DIELLOR INOX SOL 300 V2**

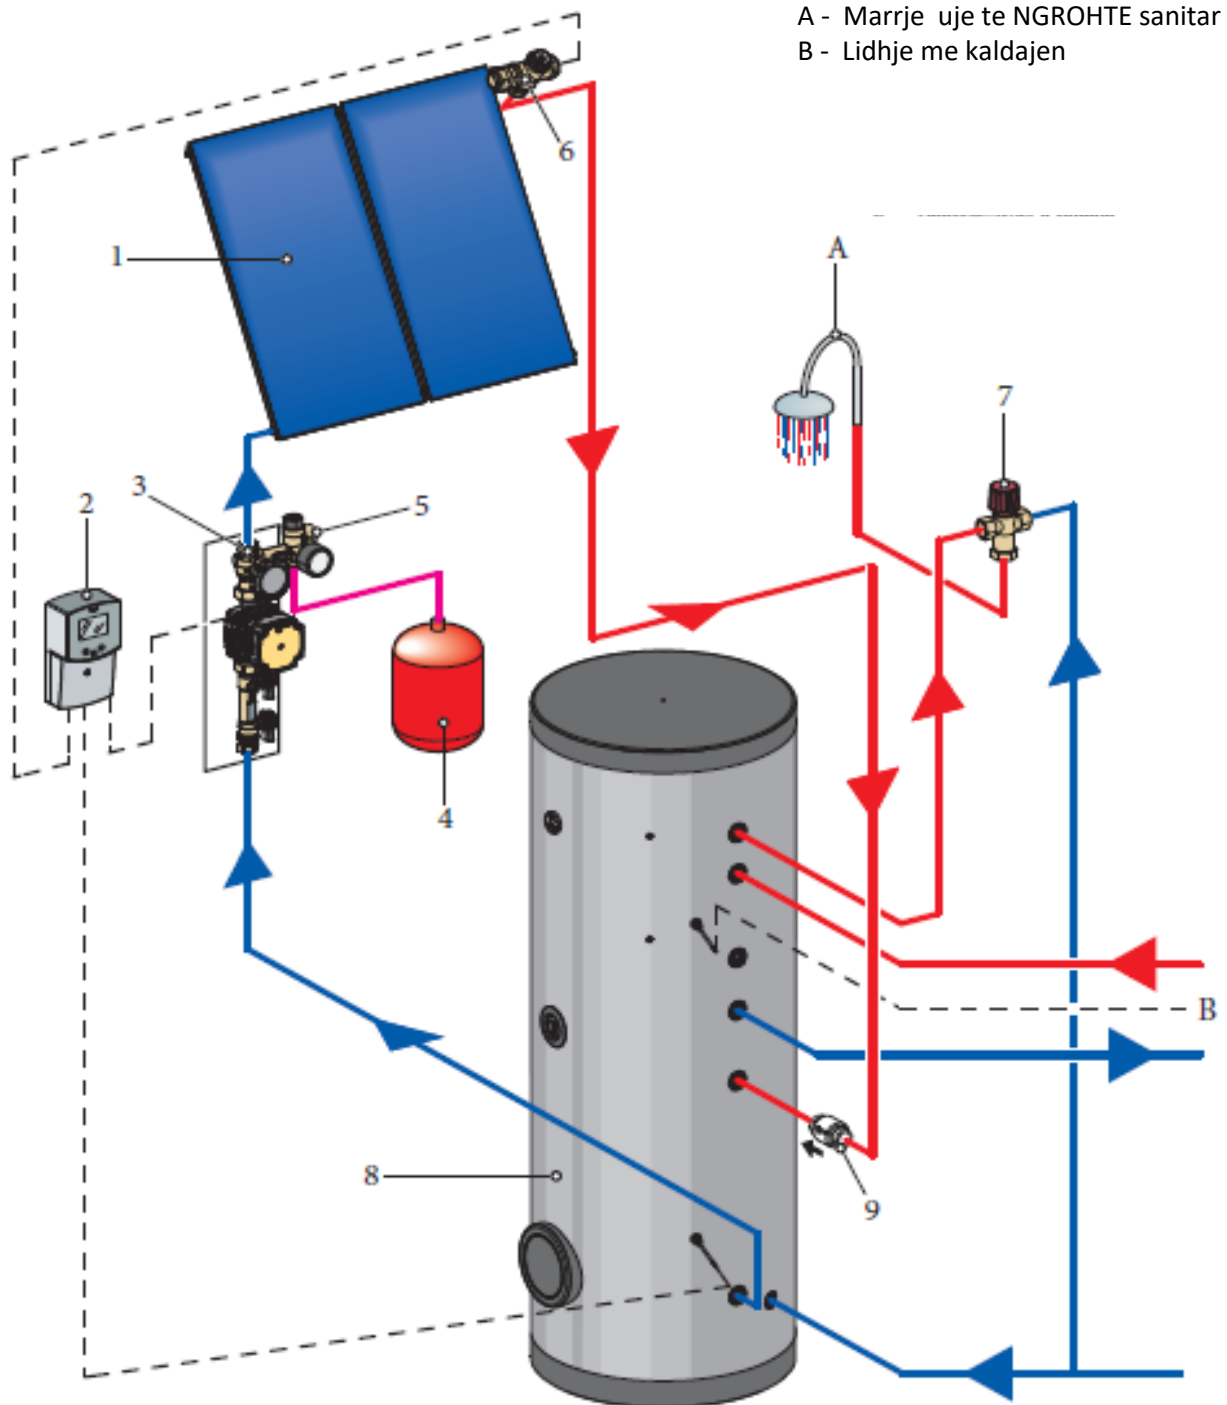




**SKEME INSTALIMI KIT DIELLOR  
INOX SOL 500 V2**


- A - Marrje uje te NGROHTE sanitar
- B - Lidhje me kaldajen

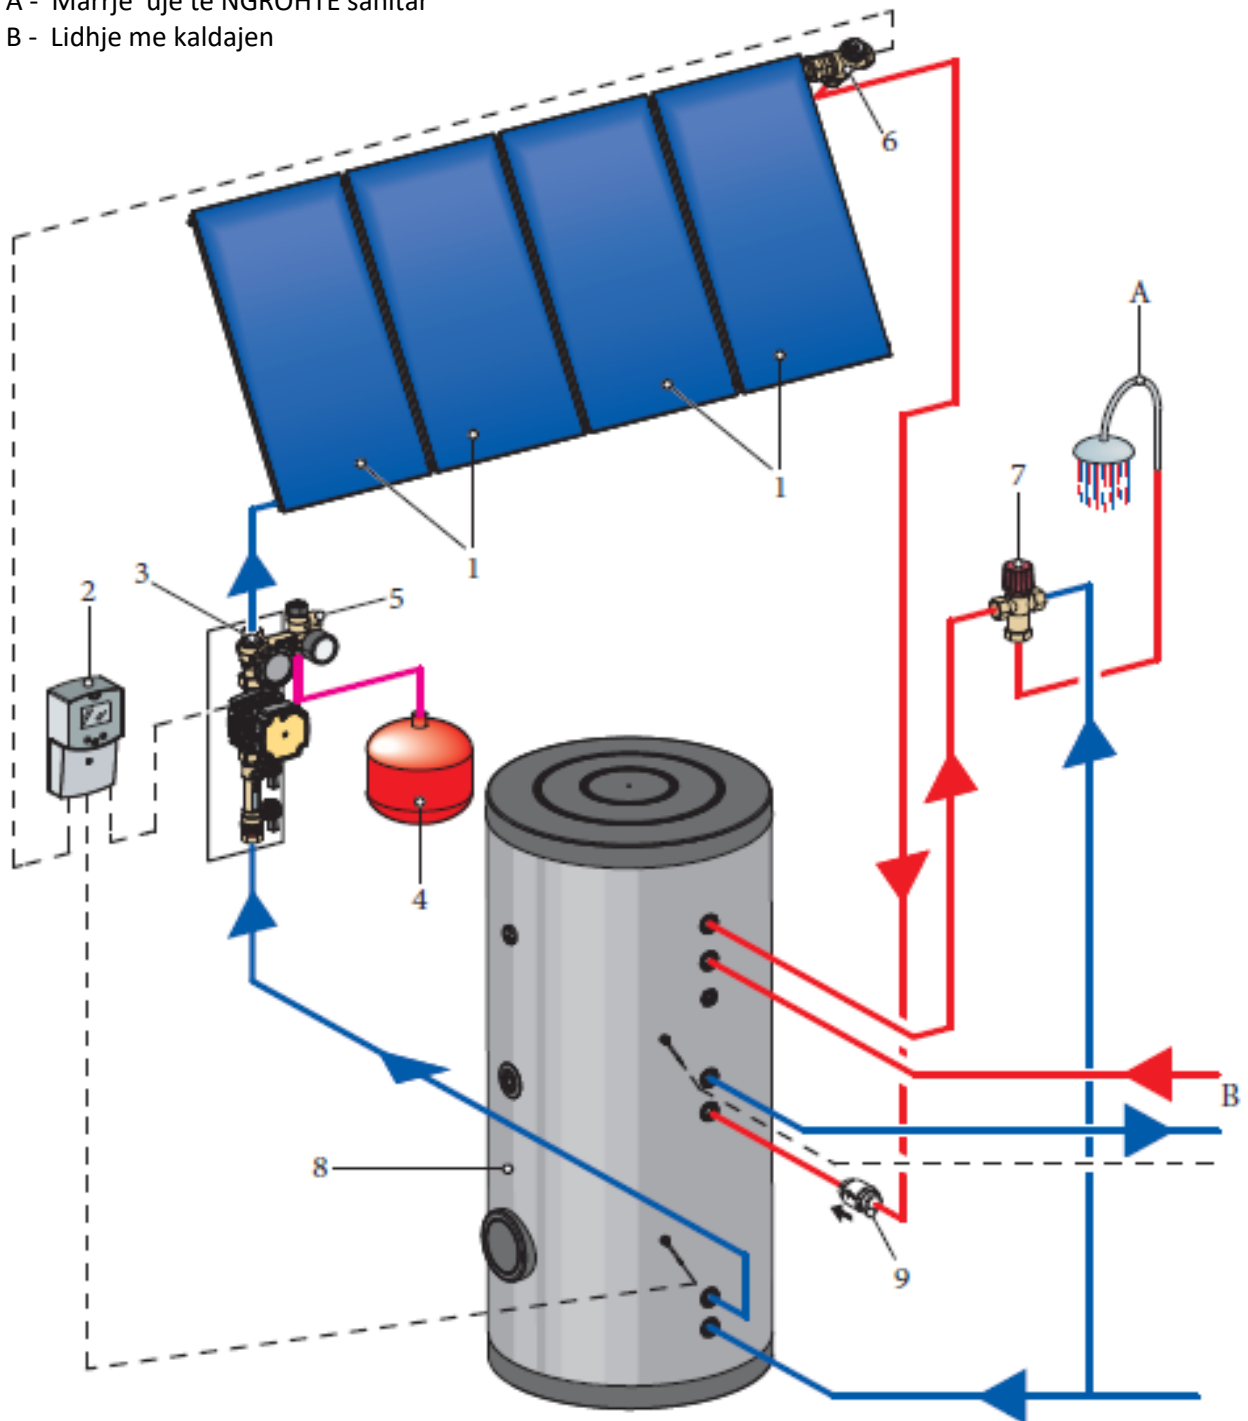

SKEME INSTALIMI BASIC SOL V2

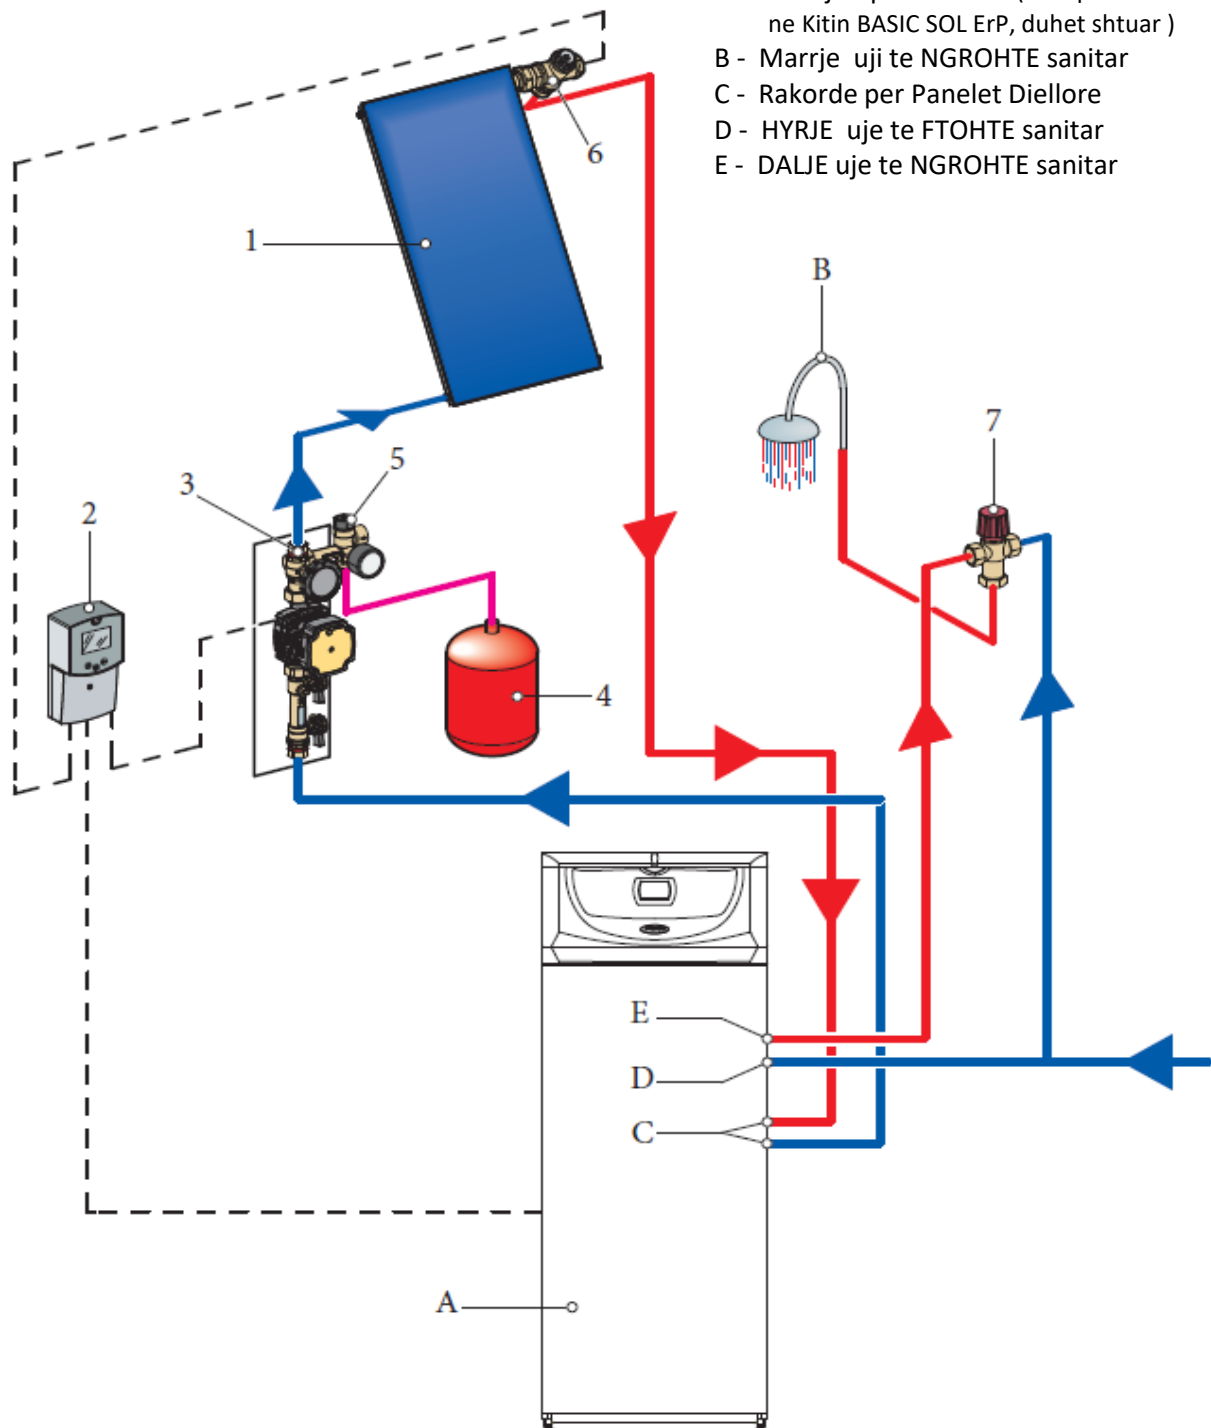

**SKEME INSTALIMI DOMESTIC SOL 550 V2**

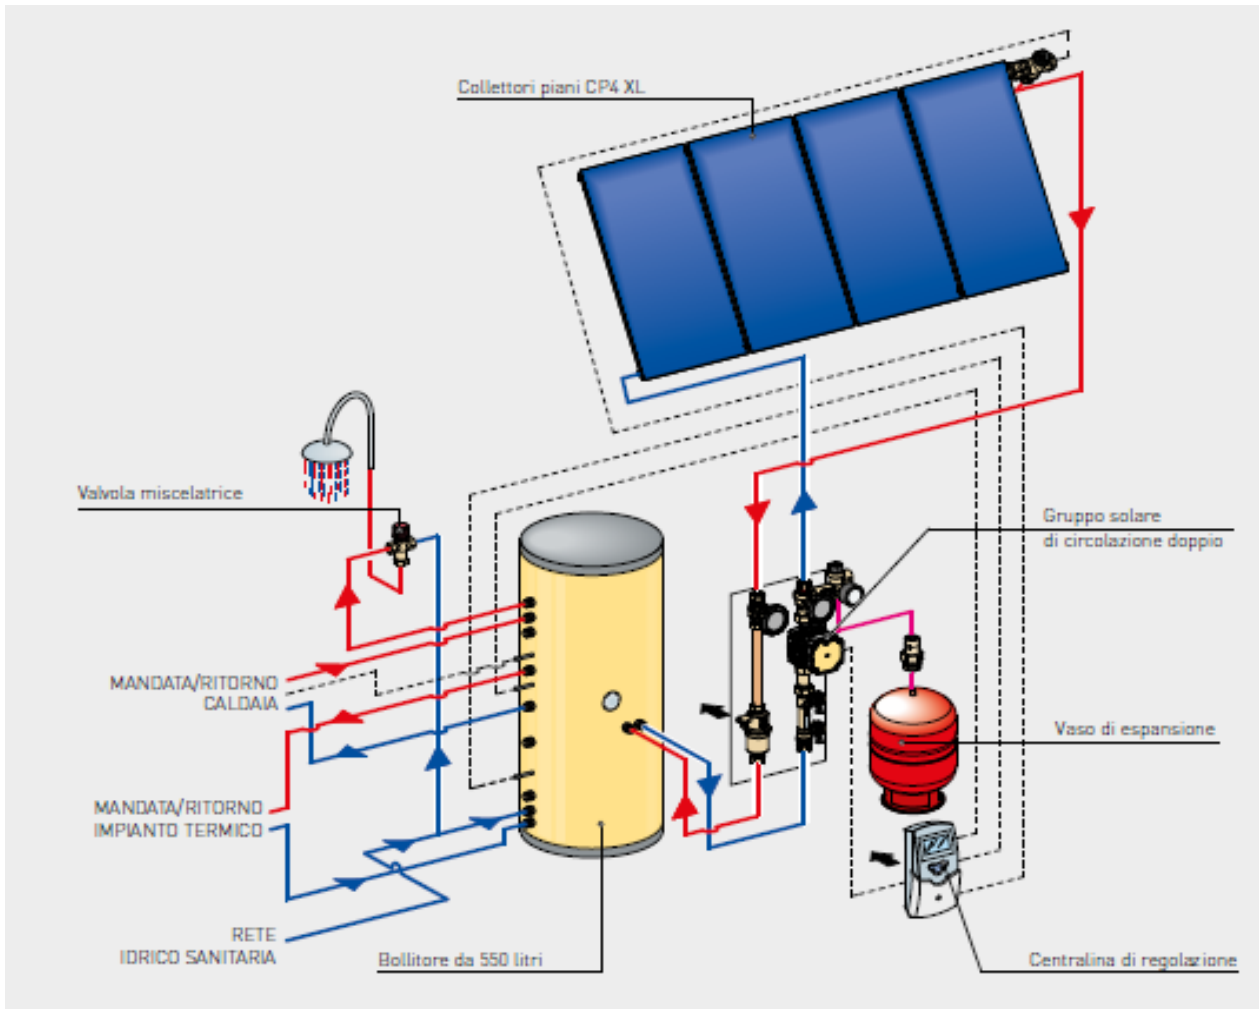

**SKEME INSTALIMI DOMESTIC SOL 750 V2**

